

# Serie **FR** PREMIUM line

## FRANTUMATORE GIREVOLE


ROTATING PULVERIZER

BROYEUR ROTATIF

DEMOLEDOR ROTATIVO


DREHBARE PULVERISIERER

GARRA PULVERIZADORA



(1) Accoppiamento escavatore-attrezzatura ottimale  
Optimum excavator-equipment combination  
Couplage pelle-équipement optimal  
Acoplamiento excavadora-implimento optimal  
Optimale Bagger-Ausrüstung Kombination  
Combinação máquina-implimento ideal

(2) Accoppiamento escavatore-attrezzatura possibile  
Possible excavator-equipment combination  
Couplage pelle-équipement possible  
Acoplamiento excavadora-implimento posible  
Mögliche Bagger-Ausrüstung Kombination  
Combinação máquina-implimento possível

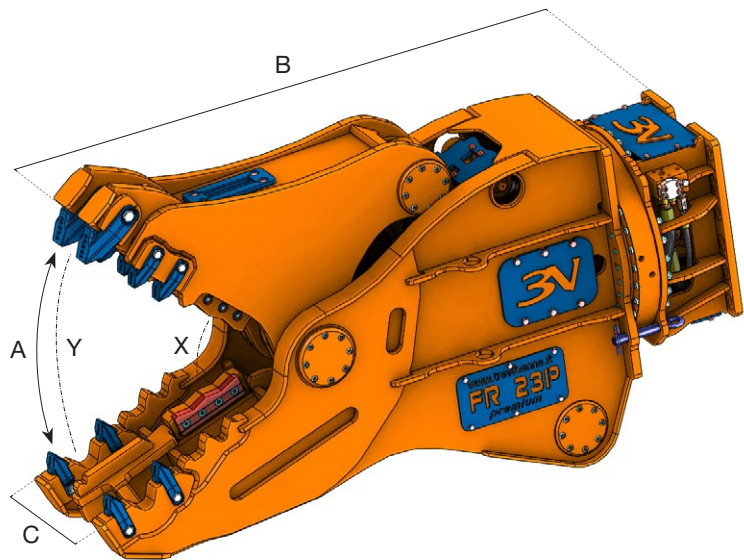

		FR 18P	FR 23P	FR 28P
	kg.	1970	2480	3120
A	mm.	755	890	930
B	mm.	2180	2410	2520
C	mm.	520	520	600
	mm.	220	260	260
X	t.	245	250	260
Y	t.	90	105	120
∅ max	mm.	40	45	50
	bar	250	250	250
	l/min.	130 / 200	180 / 250	230 / 300
	bar	140	140	140
	l/min.	10	10	10
		/	/	/