


# Multi Cutter MC200

Break-up work at a high level

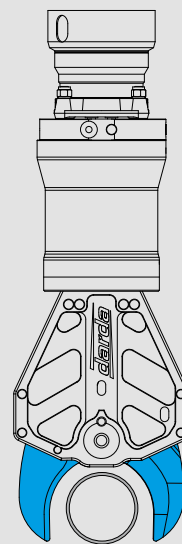

## Facts

- 50 t | 110000 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

## Specifications | Multi Cutter MC200

Dimensions and weight		
Length x Width x Height <sup>1</sup>	1008 x 245 x 334 mm	40 x 10 x 13 in
Jaw opening	200 mm	8 in
Total weight <sup>1</sup>	130 kg	280 lb
Carriers		
Recommended carrier weight, max. <sup>2</sup>	1.2 - 2.8 t	2650 - 6170 lb
Recommended Brokk machines	Brokk 110/120D / 170	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	25 MPa (250 bar)	3625 psi
Operating pressure	19 MPa (190 bar)	2756 psi
Oil flow, max.	90 l/min	24 gal/min
Power output		
Cutting force, max.	490 kN (50 t)	110200 lbf
Cutting capacity for mild steel (selection of profiles)		
⊙ Ø 150 mm	6 in	
⊏ 100 x 64 x 6.3 mm	4 x 2 1/2 x 1/4 in	
○ Ø 90 x 4 mm	3 1/2 x 5/32 in (3")	
— 80 x 8 mm (VA2)	3 x 5/16 in (VA2)	
Ordering information		
Article no. <sup>1</sup>	9014 0390 00	


<sup>1</sup> Without attachment, incl. hydraulic rotary drive

<sup>2</sup> Depending on the load capacity table of the carrier manufacturer

**Additional support plates for various carriers on request.**

# Multi Cutter MC300

Highest cutting force with low weight

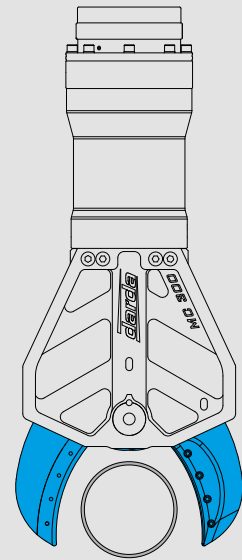

## Facts

- 60 t | 132600 lbf cutting force
- Ideal for building core removal
- Simple regrinding of blades
- High productivity
- Low wear costs

## Specifications | Multi Cutter MC300

Dimensions and weight		
Length x Width x Height <sup>1</sup>	1275 x 300 x 538 mm	50 x 12 x 21 in
Jaw opening	350 mm	14 in
Total weight <sup>1</sup>	290 kg	639 lb
Carriers		
Recommended carrier weight, max. <sup>2</sup>	2.5 - 9 t	5512 - 19842 lb
Recommended Brokk machines	Brokk 200 / 300	
Hydraulic connection		
Connection pressure, min.	17.5 MPa (175 bar)	2538 psi
Connection pressure, max.	25 MPa (250 bar)	3625 psi
Operating pressure	17 MPa (170 bar)	2466 psi
Oil flow, max.	100 l/min	27 gal/min
Power output		
Cutting force, max.	590 kN (60 t)	132600 lbf
Cutting capacity for mild steel (selection of profiles)		
⊙ Ø 180 mm	7 in	
I 120 x 64 x 6.3 mm	4 3/4 x 2 1/2 x 1/4 in	
○ Ø 140 x 4.85 mm	5 1/2 x 3/16 in (5")	
— 80 x 15 mm (VA2)	3 x 9/16 in (VA2)	
Ordering information		
Article no. <sup>1</sup>	9014 0400 79	

<sup>1</sup> Without attachment, incl. hydraulic rotary drive

<sup>2</sup> Depending on the load capacity table of the carrier manufacturer

**Additional support plates for various carriers on request.**