



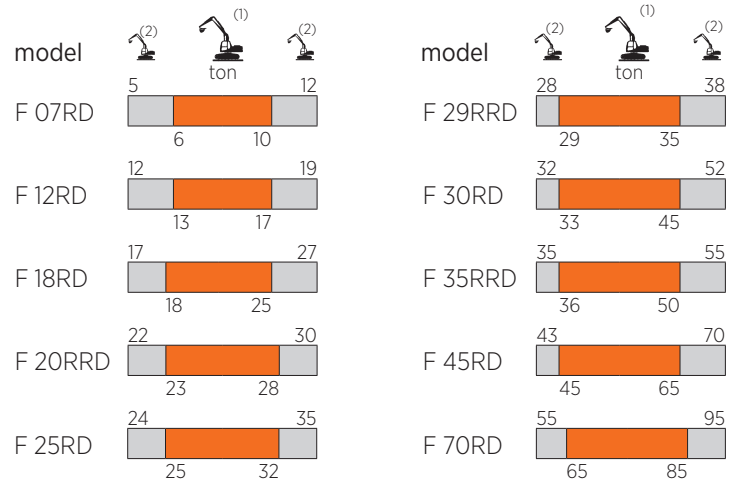

F SERIES

STATIONARY PULVERIZER

- FRANTUMATORE SECONDARIO
- BROYEUR HYDRAULIQUE
- DEMOLEDOR SECUNDARIO
- STARRE PULVERISIERER

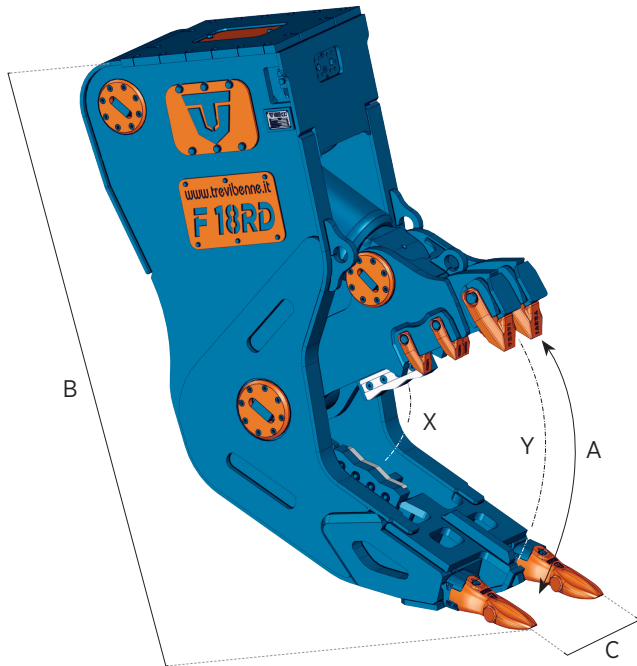

- (1) Optimum excavator-equipment combination**
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination**
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination

		F 07RD	F 12RD	F 18RD	F 20RRD*	F 25RD	F 29RRD*	F 30RD	F 35RRD*	F 45RD	F 70RD
	kg.	680	1250	1990	2405	2650	3310	3155	3720	4490	6430
A	mm.	530	700	825	825	870	870	950	950	1130	1250
B	mm.	1345	1600	1845	2215	1955	2350	2100	2450	2415	2670
C	mm.	365	460	540	540	670	670	740	740	760	800
	mm.	140	220	260	260	260	260	260	260	260	325
X	t.	105	182	248	248	289	289	332	332	407	457
Y	t.	43	78	102	102	121	121	127	127	138	187
Ø max	mm.	25	30	40	40	45	45	50	50	60	75
	bar	320	350	350	350	350	350	350	350	350	350
	l/min.	60 / 120	120 / 200	200 / 300	200 / 300	250 / 350	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
	bar	/	/	/	140	/	140	/	140	/	/
	l/min.	/	/	/	10 / 20	/	10 / 20	/	10 / 20	/	/



* Model equipped with continuous hydraulic 360° rotation / * Modello fornito con rotazione idraulica continua a 360° / * Modèle équipé de rotation hydraulique à 360° en continu
 * Modelo entregado con rotación hidráulica continua a 360° / * Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung



F SERIES

STATIONARY PULVERIZER with magnet

- FRANTUMATORE SECONDARIO CON MAGNETE
- BROYEUR HYDRAULIQUE AVEC AIMANT
- DEMOLEDOR SECUNDARIO CON IMÁN
- STARRE PULVERISIERER MIT MAGNET

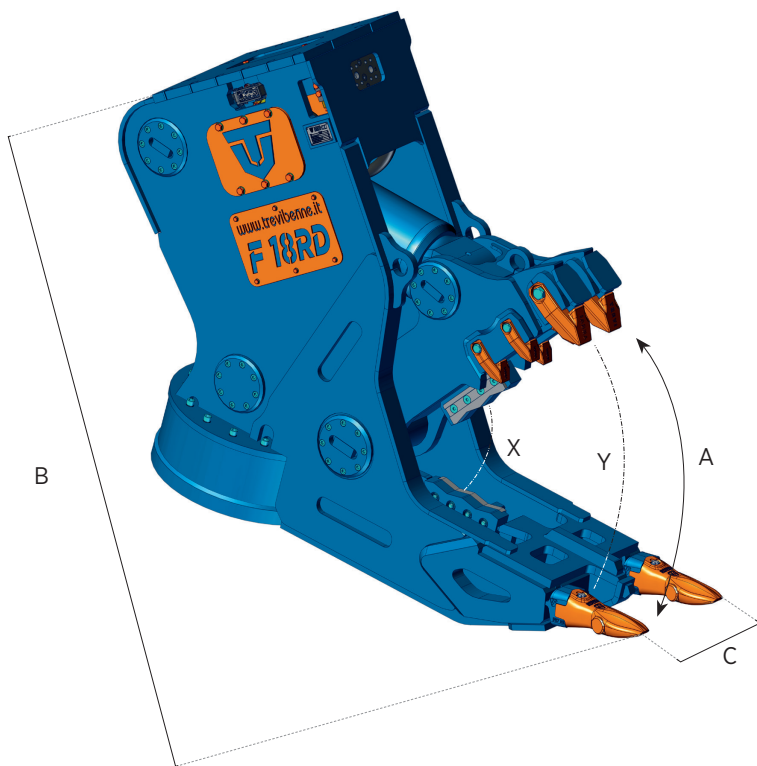

- (1) Optimum excavator-equipment combination
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination

		F 18RDM	F 25RDM	F 30RDM
	kg.	2500	3300	3900
	mm.	660	770	770
A	mm.	825	870	950
B	mm.	1845	1955	2100
C	mm.	540	670	740
	mm.	260	260	260
X	t.	248	290	332
Y	t.	102	121	127
Ø max	mm.	40	45	50
	bar	350	350	350
	l/min.	200 / 300	250 / 350	300 / 400
	bar	/	/	/
	l/min.	/	/	/
		/	/	/



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY