




RC SERIES





RAIL CROPPER

- TRANCIA BINARI
- CASSE RAIL
- CORTA RAÍLES
- SCHIENENKNACKER

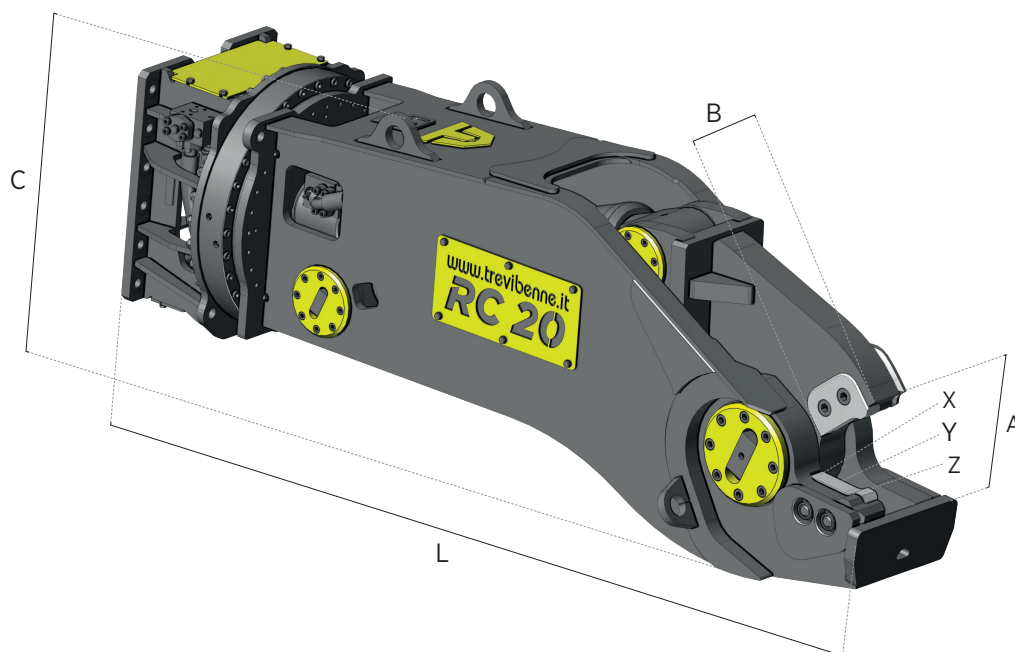

		RC 20*	RC 30 *
	kg.	2150	3080
A	mm.	190	260
B	mm.	230	275
C	mm.	920	990
L	mm.	2500	2635
X	t.	510	760
Y	t.	304	415
Z	t.	224	300
max	bar	350	350
	l/min.	200 / 300	300 / 400
max	bar	140	140
	l/min.	10 / 20	10 / 20
		/	/

* Relief valve setted at 250 bar / * Valvola limitatrice tarata a 250 bar
 * Valve de sécurité tarée à 250 bar / * Válvula de seguridad ajustada a 250 bar
 * Sicherheitsventil auf 250 bar eingestellt



(1) Optimum excavator-equipment combination
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination

(2) Possible excavator-equipment combination
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination



HARDOX®
WEAR PLATE

