



Serie **BM**




BENNA FRANTOIO


CRUSHING BUCKET
 GODET CONCASSEUR
 CUCHARA DEMOLEDORA
 BRECHERLÖFFEL
 CAÇAMBA TRITURADORA

model	(2)	(1)	(2)
	ton		
BM 15	11	20	22
BM 25e	17	25	27
BM 35e	24	45	50

- (1) Accoppiamento escavatore-attrezzatura ottimale
 Optimum excavator-equipment combination
 Couplage pelle-équipement optimale
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination
 Combinação máquina-implemento ideal
- (2) Accoppiamento escavatore-attrezzatura possibile
 Possible excavator-equipment combination
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination
 Combinação máquina-implemento possível

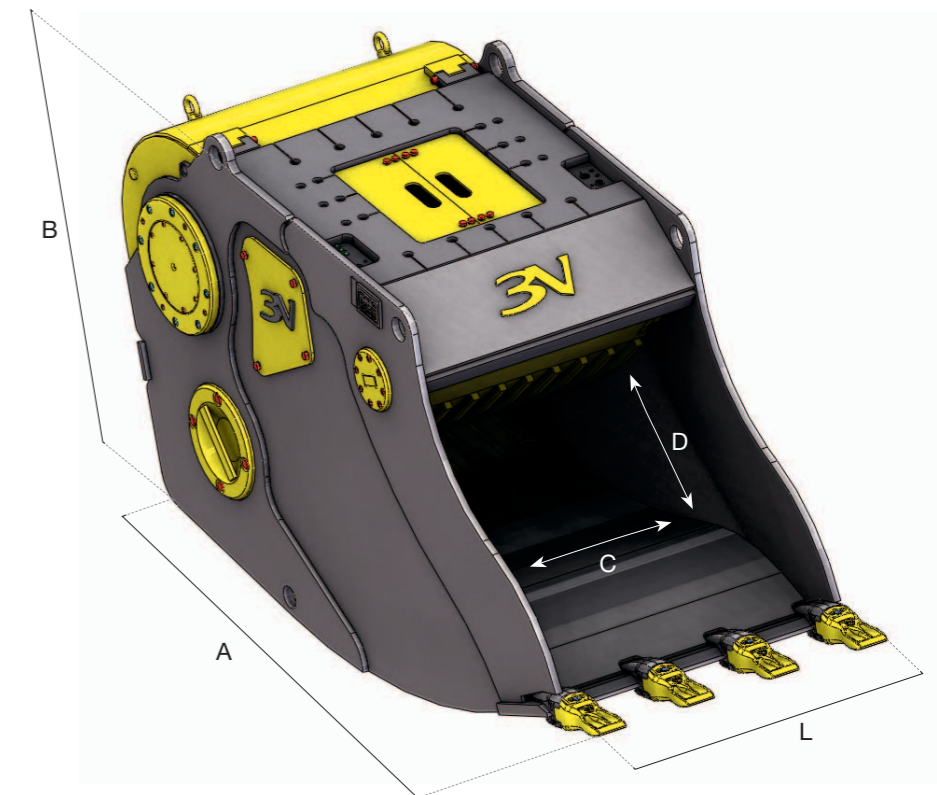

Produzione oraria con materiale di media consistenza
 Production of average toughness material
 Production par heure sur matériel de dureté moyenne
 Producción horaria con material de media consistencia
 Stundenleistung mit Material von mittlerer Konsistenz
 Produção por hora com material de média consistência

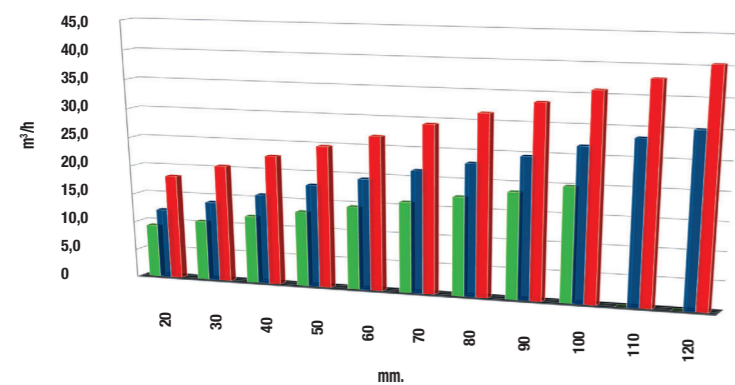

mm	BM 15 m³	BM 25e m³	BM 35e m³
20	9,3	12,2	18,3
30	10,5	14,0	20,5
40	11,9	15,8	22,7
50	13,2	18,0	24,8
60	14,6	19,5	26,9
70	15,9	21,4	29,3
80	17,3	23,1	31,5
90	18,6	24,7	33,6
100	20,0	26,8	35,9
110	/	28,5	38,0
120	/	30,2	40,5



		BM 15	BM 25e	BM 35e
kg	kg.	1550	2650	3950
A	mm.	2030	2350	2805
B	mm.	1170	1220	1420
L	mm.	820	870	1050
C	mm.	600	775	980
D	mm.	450	590	660
Cap. SAE	m³	0,5	0,55	0,95
♀	bar	200	220	220
♂	l/min.	150	180	180
♂	mm.	20 / 100	20 / 120	20 / 120
♂		✓	✓	✓